

TECHNICAL SPECIFICATIONS - POLYSUR® TYPE 276

	Unit/Testing standard	500/3	630/4	800/4	1000/5
Construction					
Carcass type		EP	EP	EP	EP
Warp		Polyester	Polyester	Polyester	Polyester
Weft		Polyamid	Polyamid	Polyamid	Polyamid
Textile plies		3	4	4	5
Type per ply		EP 160	EP 160	EP 200	EP 200
Belt thickness nom.	mm	5,5	6,7	8,1	9,4
Rubber covers top nom.	mm	1,0	1,5	2,0	2,0
Rubber covers bottom nom.	mm	1,0	1,5	2,0	2,0
Belt weight nom.	kg/m ²	6,2	7,8	9,7	11,3
Properties					
Tensile strength	N/mm	>500	>630	>800	>1000
Elongation at break	%	>10	>10	>10	>10
Elongation at 10% working load	%	<1,5	<1,5	<1,5	<1,5
Adhesion covers - plies	N/mm	>6	>6	>6	>6
Adhesion between plies	N/mm	>6	>6	>6	>6
Rubber properties					
Type of rubber	Polymer	NBR	NBR	NBR	NBR
Oil and fat resistance		very good	very good	very good	very good
Swelling in oil IRM 903	72u / 70° C. in %	<5	<5	<5	<5
Tensile strength	Mpa	>14	>14	>14	>14
Elongation	%	>350	>350	>350	>350
Hardness (+/- 5°)	° Shore A	64 +/- 5	64 +/- 5	64 +/- 5	64 +/- 5
Abrasion resistance	mm ³	<180	<180	<180	<180
Additional properties					
Temperature dry, low fat product	°C.	-25/+120	-25/+120	-25/+120	-25/+120
Temperature fat and/or moist product	°C.	-25/+80	-25/+80	-25/+80	-25/+80
Anti-static <3.10 ⁸	Ω in accordance with ISO	yes	yes	yes	yes
Flame retardant	in accordance with ISO	no	no	no	no
Minimum pulley diameter		300 mm	400 mm	450 mm	500 mm
Testing norm in accordance with DIN22102, ISO 37, 251, 252, 283, 284, 340, 583, 868, 13934, 2781, 4649, 7619, 9856					

Shown values are average values.



**POLYSUR®
TYPE 276 NBR
OIL- AND FAT
RESISTANT QUALITY**

This belt quality is excellent oil- and fat resistant and also very resistant against various acids and chemicals. Type 276 has proven itself in elevators operating 24/7 at challenging conditions. These elevator belts are used in elevators which transport products that contain vegetable, animal and mineral oils and fats.

APPLICATIONS


- animal feed
- crushed soybean and rapeseed
- bituminous products
- fertilizer
- sunflower seed
- fish meal
- derivatives

AVAILABLE FROM STOCK

- EP 500/3 1,5+1,5 mm
- EP 630/4 1,5+1,5 mm
- EP 800/4 2,0+2,0 mm
- EP 1000/5 2,0+2,0 mm

Other constructions available on request.

Not legally binding - subject to change and terms. Version 2015 / 1.1

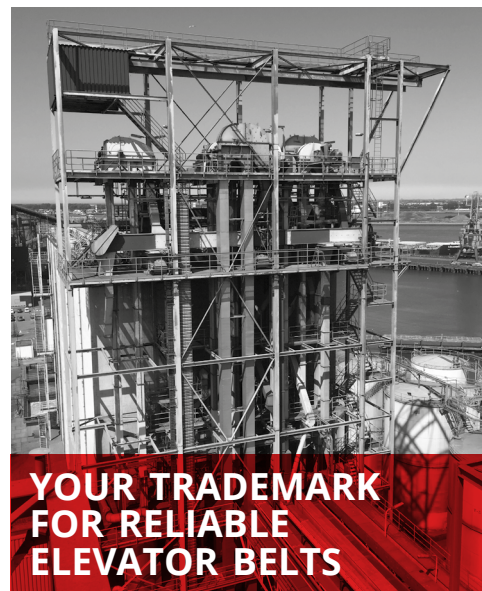

**YOUR TRADEMARK
FOR RELIABLE
ELEVATOR BELTS**